


1、悬垂线夹(节能型中心回转式)

Suspension Clamps (trunnion type)

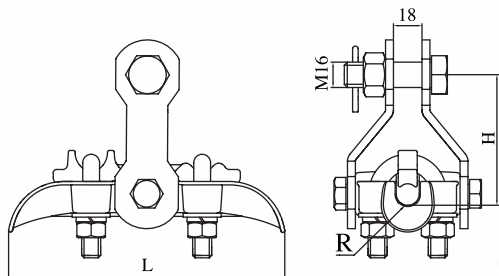


型号 Catalog No.	适用导线范围 Applicable Conductor (mm)	主要尺寸 Dimensions (mm)			标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	L	R		
XGU-1J	5.0~7.0	82	175	4.0	40	1.07
XGU-2J	7.1~13.0	82	175	7.0	40	1.09
XGU-3J	13.1~21.0	102	198	11.0	40	1.25
XGU-4J	21.1~26.0	110	215	13.5	40	1.62

线夹本体和压板为铝合金，闭口销为不锈钢制件，其余为钢制件。可锻铸铁件和钢制件热镀锌。

The clamp body and keepers are malleable iron. cotter-pins are stainless steel, the other parts are steel. All ferrous parts are hot-dip galvanized.

2、悬垂线夹(中心回转式)

Suspension Clamps (trunnion type)

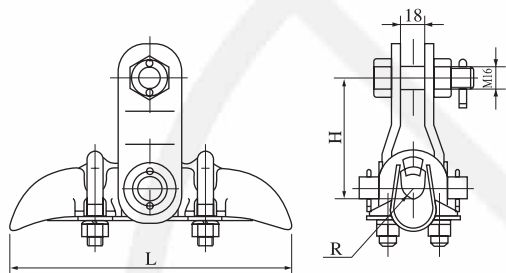


型号 Catalog No.	适用导线范围 Applicable Conductor (mm)	主要尺寸 Dimensions (mm)			标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	L	R		
XGU-1	5.0~7.0	82	180	4.0	40	1.4
XGU-2	7.1~13.0	82	200	7.0	40	1.8
XGU-3	13.1~21.0	102	220	11.0	40	2.0
XGU-4	21.1~26.0	110	250	13.5	40	3.0

线夹本体和压板为可锻铸铁件，闭口销为不锈钢制件，其余为钢制件。可锻铸铁件和钢制件热镀锌。

The body and keeper are made of malleable iron. cotter-pins are made of stainless steel. other parts are made of steel. All ferrous parts are hot-dip galvanized.

3、悬垂线夹(带碗头挂板)

Suspension Clamps (with socket-clevis eye)

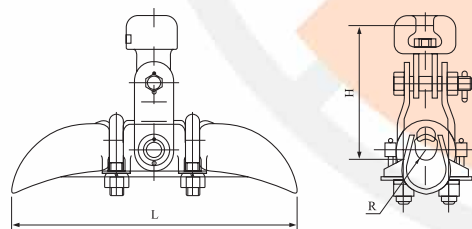

型号 Catalog No.	适用导线范围 Applicable Conductor (mm)	主要尺寸 Dimensions (mm)			标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	L	R		
XGU-5A	23.0~33.0	157	300	17	70	5.7
XGU-6A	34.0~45.0	163	300	23	70	6.1

线夹本体、压板和碗头挂板为可锻铸铁件，闭口销为不锈钢制件，其余为钢制件。可锻铸铁件和钢制件热镀锌。


The clamp body, keepers and socket-clevis are malleable iron, the closed-pine is stainless steel work. the other parts are steel, All ferrous parts are hot-dip galvanized.

J

悬垂线夹
Suspension clamps

4、悬垂线夹(带 U 形挂板)

Suspension Clamps (with U type clevis)

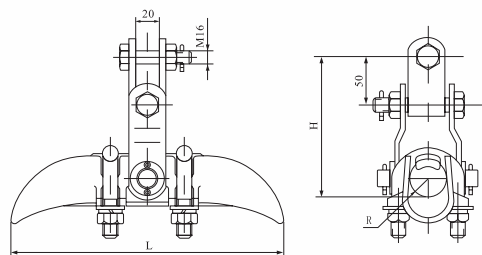

型号 Catalog No.	适用导线范围 Applicable Conductor (mm)	主要尺寸 Dimensions (mm)			标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	L	R		
XGU-5B	23.0~33.0	137	300	17	70	5.4
XGU-6B	34.0~45.0	143	300	23	70	5.8
XGU-7(B)	45.0~48.7	156	300	26	70	6.2

线夹本体、压板为可锻铸铁件，闭口销为不锈钢制件，其余为钢制件。可锻铸铁件和钢制件热镀锌。

The clamp body, keepers are malleable iron, the closed-pine is stainless steel work. the other parts are steel, All ferrous parts are hot-dip galvanized.

5、悬垂线夹(防磨型)

Suspension Clamps (abrasion-proof type)

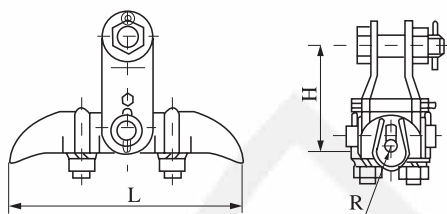


图 (1)

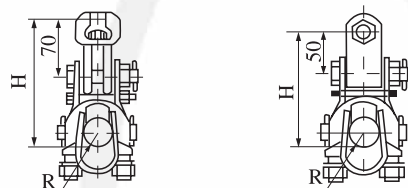


图 (2)

图 (3)


型号 Catalog No.	适用导线范围 Applicable Conductor (mm)	主要尺寸 Dimensions (mm)			图号 Fig No.	标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	L	R			
XGU-1F	5.0~7.0	82	180	4.0	1	40	1.4
XGU-2F	7.1~13.0	102	200	7.0		40	1.8
XGU-3F	13.1~21.0	121	220	11.0		40	2.0
XGU-4F	21.1~26.0	130	250	13.5		40	3.0
XGU-5F	23.0~33.0	140	300	17		60	4.7
XGU-6F	34.0~45.0	155	300	23	2	60	5.1
XGU-5AF	23.0~33.0	210	300	17		60	5.7
XGU-6AF	34.0~45.0	220	300	23		60	6.1
XGU-5BF	23.0~33.0	190	300	17	3	60	5.4
XGU-6BF	34.0~45.0	205	300	23		60	5.8
XGU-7BF	45.0~48.7	310	300	26		60	6.4

线夹本体和压板为可锻铸铁件，闭口销为不锈钢制件，其余为钢制件、可锻铸铁件和钢制件热镀锌。

The body and keeper are made of malleable iron. cotter-pins are made of stainless steel. other parts are made of steel. All ferrous parts are hot-dip galvanized.

6、悬垂线夹

Suspension Clamps

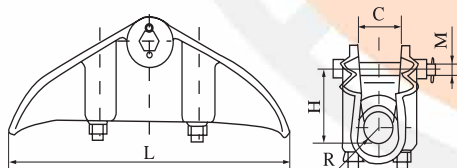

型号 Catalog No.	适用导线范围 Applicable Conductor (mm)	主要尺寸 Dimensions (mm)					标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	C	M	R	L		
XGT-1	5.0~7.0	60	18	18	4.0	180	40	3.3
XGT-2	7.1~13.0	75	18	18	7.0	200	40	4.9
XGT-3	13.1~21.0	75	27	16	11.0	220	40	5.6
XGT-4	21.1~26.0	75	27	16	13.5	250	40	6.5
XGT-5	23.0~33.0	81	38	16	17.0	300	60	8.7
XGT-6	34.0~45.0	89	46	16	23.0	300	60	9.8

线夹本体和压板为铝合金，闭口销为不锈钢制件，其余为钢制件。可锻铸铁件和钢制件热镀锌。

The clamp body and keepers are malleable iron. cotter-pins are stainless steel, the other parts are steel. All ferrous parts are hot-dip galvanized.

7、悬垂线夹

Suspension Clamps

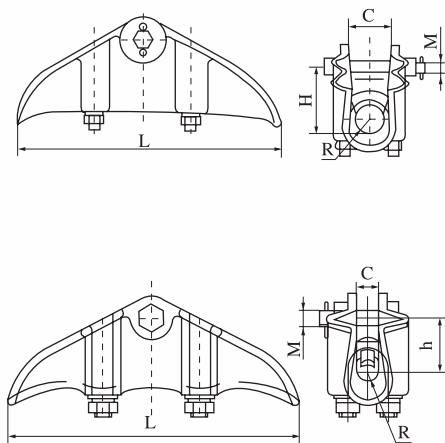


图 1

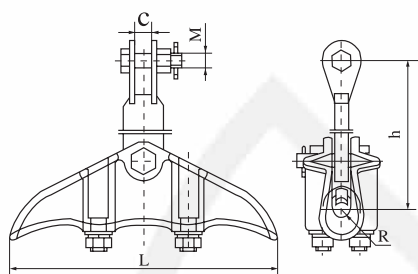


图 2


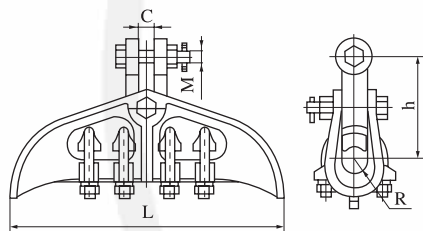


图 3

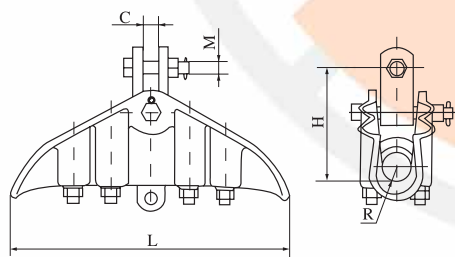

1)悬垂线夹

Suspension clamps

型号 Catalog No.	适用导线范围 Applicable Conductor(mm)	主要尺寸 Dimensions(mm)					标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	C	M	R	L		
XGT-1	5.0~7.0	60	18	18	4	180	40	3.3
XGT-2	7.1~13.0	75	18	18	7	200	40	4.9
XGT-3	13.1~21.0	75	27	16	11	220	40	5.6
XGT-4	21.1~26.0	75	27	16	13.5	250	40	6.5
XGT-5	23.0~33.0	81	38	16	17	300	60	8.7
XGT-6	34.0~45.0	89	46	16	23	300	60	9.8
XGT-2.1	7.0~13.0	135	20	16	7	200	40	4.3
XGT-4A	21.1~26.0	133	20	16	13.5	250	60	6.9

线夹本体和压板为铝合金，闭口销为不锈钢制件，其余为钢制件、可锻铸铁件和钢制件热镀锌。

The clamp body and keepers are malleable iron.cotter-pins are stainless steel,the other parts are steel.All ferrous parts are hot-dip galvanized.

2)悬垂线夹(XGJ 型)

Suspension clamps (Type XGJ)

型号 Catalog No.	简图 Fig	适用导线范围 Applicable Conductor(mm)	主要尺寸 Dimensions(mm)					标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (Kg)
			H	C	M	R	L		
XGJ-2	1	11~13	52	19	18	8	300	100	4.4
XGJ-3	2	13.1~18.0	190	18	16	9	300	70	4.8
XGJ-4	2	21.1~23.0	190	18	16	11	300	70	4.9
XGJ-5	3	23~43	121	24	22	22	390	120	8.8
XGJ-5A	3	23.0~43.0	180	24	22	22	476	120	9.1
XGJ-5B	3	23.0~43.0	180	24	24	22	476	160	13.4

线夹本体和压板为铝合金，闭口销为不锈钢制件，其余为钢制件、可锻铸铁件和钢制件热镀锌。

The clamp body and keepers are malleable iron.cotter-pins are stainless steel,the other parts are steel.All ferrous parts are hot-dip galvanized.

3)悬垂线夹

Suspension Clamps

型号 Catalog No.	适用导线范围 Applicable Conductor(mm)	主要尺寸 Dimensions(mm)					标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (Kg)
		H	C	M	R	L		
XGJ-5Z	36.0~43.0	202	26	24	22	400	120	16.0
XGJ-6Z	36.0~47.0	212	26	24	24	500	150	20.0

线夹本体和压板为铝合金，闭口销为不锈钢制件，其余为钢制件、可锻铸铁件和钢制件热镀锌。


The clamp body and keepers are malleable iron.cotter-pins are stainless steel,the other parts are steel.All ferrous parts are hot-dip galvanized.

J

悬垂线夹
Suspension clamps

4) 悬垂线夹

Suspension Clamps

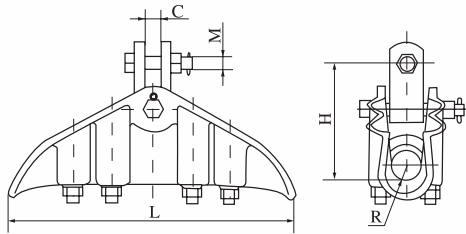


型号 Catalog No.	适用导线范围 Applicable Conductor(mm)	主要尺寸 Dimensions(mm)					标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	C	M	R	L		
XGJ-6.1	36.0~43.0	410	38	36	22	900	200	70.0
XGJ-7.1	43.0~50.0	410	38	36	25	1100	300	82.0

线夹本体为铝合金，压板为铝合金制作，闭口销为不锈钢制件，其余为钢制件、可锻铸铁件和钢制件热镀锌。

The clamp body is malleable iron, the keepers are aluminium alloy, cotter-pin is stainless steel, the other parts are steel. All ferrous parts are hot-dip galvanized.

8、悬垂线夹(提包式)

Aluminium Alloy Suspension Clamps (Envelope Type)

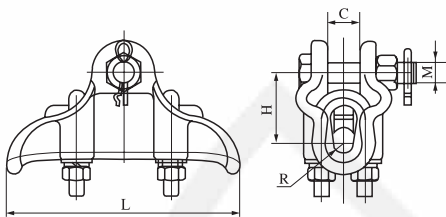


型号 Catalog No.	适用导线范围 Applicable Conductor(mm)	主要尺寸 Dimensions(mm)					标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		H	C	M	R	L		
XGH-2	5.1~12.5	52.5	25	16	8	166	40	1
XGH-3	12.4~17.0	50.5	23	16	11.5	200	40	1.5
XGH-3A	12.4~17.0	50	22	16	10	180	50	1.5
XGH-4	19.0~23.5	59.5	27	16	13.5	225	40	2.3
XGH-5	24.2~28.0	70	32	16	16	260	60	3.0
XGH-6	25~35	68	35	16	17.5	216	60	3.6

线夹本体和压板为铝合金件，闭口销为不锈钢制件，其余为热镀锌钢制件。

The clamp body and keepers are aluminium alloy, cotter-pin is stainless steel, the other parts are hot-dip galvanized steel.

9、悬垂线夹(双导线用)

Suspension Clamps for Twin Conductors

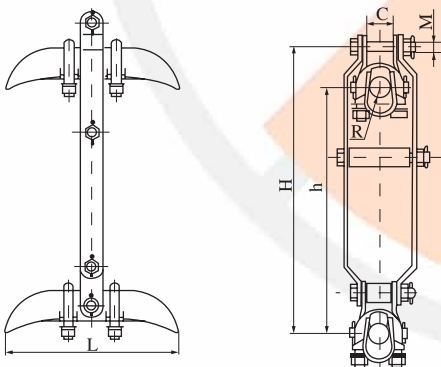


型号 Catalog No.	适用导线范围 Applicable Conductor(mm)	主要尺寸 Dimensions(mm)						标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		h	L	R	C	H	M		
XCS-4	21~26	400	250	13.5	20	490	18	70	9.3
XCS-5	23~33	400	300	17.0	38	490	18	100	10.8
XCS-6	34~45	400	300	23.0	38	495	18	100	12.5

线夹本体和压板为可锻铁件，闭口销为不锈钢制件，其余为钢制件，可锻铸铁件和钢制件热镀锌。

The clamp body and keepers are malleable iron, cotter-pins are stainless steel, the other parts are steel, All ferrous parts are hot-dip galvanized.

10、悬垂线夹(双导线用)

Aluminium Alloy Suspension Clamps for Twin Conductors

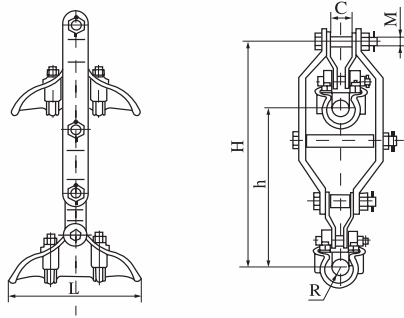


型号 Catalog No.	适用导线范围 Applicable Conductor(mm)	主要尺寸 Dimensions(mm)						标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		h	L	R	C	H	M		
XCS-4H	21.0~26.0	400	225	13.5	42	530	16	70	10.2
XCS-5H	26.0~31.5	400	300	16.0	44	545	18	100	11.4
XCS-6H	32.0~43.0	400	300	22.0	50	550	22	120	12.9

闭口销为不锈钢制件，紧固件为热镀锌钢制件，其余为铝合金制件。

Cotter-pins are stainless steel, fasteners are hot-dip galvanized steel, the other parts are aluminium alloy.

11、悬垂线夹(双跳线)

Suspension Clamp for Twin Jumper Conductors

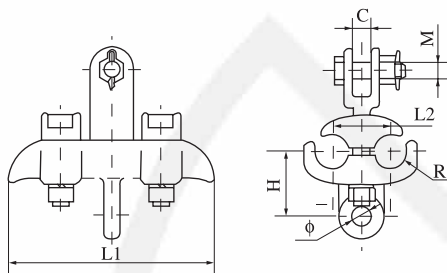

型号 Catalog No.	适用导线范围 Applicable Conductor(mm)	主要尺寸 Dimensions(mm)							标称破坏载荷 Specified Failure Load (kN)	参考重量 Weight (kg)
		Ø	R	L1	L2	M	C	H		
XTS-1	18~24		13	200	50	16	19	57	70	4.5
XTS-2	25~31	18	16	200	56	16	19	62	70	5.0
XTS-2A	17~21	18	11	200	50	16	19	57	70	4.5
XTS-2B	21~27	18	14	200	52	16	19	59	70	5.0
XTS-5	23~33	18	17	200	60	18	20	55	100	4.2
XTS-6	34~45	18	23	250	77	16	20	70	70	7.5

线夹本体和压板为可锻铸铁件或铸铁，闭口销为不锈钢制件，铸铁件和钢制件热镀锌。

The clamp body and deepers are aluminium alloy, cotter-pin are stainless steel, the other parts are hot-dip galvanized steel.